



OLCT60

A new generation of high quality gas detectors designed for the detection of flammable, toxic gases or oxygen.

- SIL 2 compatible
- Pre-calibrated sensors
- Non-intrusive calibration
- Infrared Version

Certifications



The OLCT 60 Series is available in several versions:

- Explosion-proof XP or intrinsically safe IS sensor (combustible, toxic or oxygen versions).
- Remote or on-board sensor. The OLCT 60 can be remotely mounted, allowing detection in inaccessible locations or in Zone 0 or 20 in the case of the intrinsically safe (IS) version.
- Infrared XP IR sensor or OLCT IR transmitter.

The OLCT 60 is equipped with a local display and non-intrusive access to a safe menu. In hazardous areas, calibration can be done without the need of a hot work permit.

The detector units are made of 316L stainless steel, and are rugged and resistant to corrosion.

Certified IP66, the OLCT 60 is sealed against dust and splash water. The versatile instrument is the ideal solution for gas detection covering all industrial needs for a wide variety of applications.

The OLCT 60 can be combined with our infrared OLCT IR transmitter for harsh applications such as refinery, onshore or offshore installations. This combination offers outstanding reliability (the OLCT IR has an MTBF of 28 years) and simple operation.

XP IR sensor available

The OLCT 60 can now be equipped with an infrared sensor, allowing the detection of CO₂ in severe environmental conditions where the presence of poisons could harm a catalytic cell.

Guaranteed for 3 years, the OLCT 60 XP IR version requires minimal maintenance and provides guaranteed extreme accuracy and constant stability.



OLCT 60 with OLCT IR



Infrared XP IR Sensor

Sensors technical specifications

Gas		Measuring Range (ppm)	XP Version	IS Version	Temperature Range (°C)	% RH	Accuracy (ppm)	Average Life Expectancy (month)	Response Time T ₅₀ /T ₉₀ (s)	Storage Condition
Explosive Gases	Infrared OLCT IR	0-100% LEL	·	·	-20 to +55	0 - 99	+/- 5% (CH ₄) +/- 3% (HC)	> 60	9/15 (CH ₄) with cover 7/8 (CH ₄) without cover	(a)
	Catalytic	0-100% LEL	·	·	-20 to +55	0 - 95	+/- 1% LEL (de 0 à 70% LEL)	40	6/15 (CH ₄)	(b)
AsH ₃	Arsine	1.00	·	·	-20 to +40	20 - 90	+/- 0.05	18	30/120	(a)
Cl ₂	Chlorine	10.0	·	·	-20 to +40	10 - 90	+/- 0.4	24	10/60	(a)
ClO ₂	Chlorine dioxide	3.00	·	·	-20 to +40	10 - 90	+/- 0.3	24	20/120	(a)
CO	Carbon monoxide	100	·	·	-20 to +50	15 - 90	+/- 3 (range 0-100)	40	15/40	(a)
		300	·	·						
		1000	·	·						
CO ₂	Carbon dioxide	0-5% vol.	·	·	-25 to +55	0 - 95	+/- 3	48	11/30	(a)
COCl ₂	Phosgene	1.00	·	·	-20 to +40	15 - 90	+/- 0.05	12	60/180	(c)
ETO	Ethylene oxide	30.0	·	·	-20 to +50	15 - 90	+/- 1.0	36	50/240	(a)
H ₂	Hydrogen	2000	·	·	-20 to +50	15 - 90	+/- 5%	24	30/50	(a)
H ₂ S	Hydrogen sulfide	30.0	·	·	-20 to +50	15 - 90	+/- 1.5 (range 0-30)	36	15/30	(a)
		100	·	·						
		1000	·	·						
HCl	Hydrogen chloride	30.0 100	·	·	-20 to +40	15 - 95	+/- 0.4 (range 0-10)	24	30/150	(a)

Gas		Measuring Range (ppm)	XP Version	IS Version	Temperature Range (°C)	% RH	Accuracy (ppm)	Average Life Expectancy (month)	Response Time T ₅₀ /T ₉₀ (s)	Storage Condition
HCN	Hydrogen cyanide	10.0 30.0	.	.	-25 to +40	15 - 95	+/- 0.3 (range 0-10)		30/120	(c)
HF	Hydrogen fluoride	10.0	.	.	-10 to +30	20 - 80	+/- 5%	12	40/90	(c)
NH ₃	Ammonia	100	.	.	-20 to +40	15 - 90	+/- 5	24	25/70	(a)
		1000	.	.			+/- 20		20/60	
		5000	.	.			+/- 150 or 10%		60/180	
NO	Nitrogen monoxide	100	.	.	-20 to +50	15 - 90	+/- 2 (range 0-100)	36	10/30	(a)
		300	.	.						
		1000	.	.						
NO ₂	Nitrogen dioxide	10.0 30.0	.	.	-20 to +50	15 - 90	+/- 0.8	24	30/60	(a)
			.	.						
O ₂	Oxygen	0-30% vol.	.	.	-20 to +50	15 - 90	0.4% Vol (from 15 to 22% O ₂)	28	6/15	(a)
			.	.	-20 to +50	15 - 90	+/- 1.5%			
O ₃	Ozone	1.00	.	.	0 to +40	10 - 90	+/- 0.03 (from 0 to 0.2 ppm) +/- 0.05 (from 0.2 to 1 ppm)	18	40/120	(c)
PH ₃	Phosphine	1.00	.	.	-20 to +40	20 - 90	+/- 0.05	18	30/120	(a)
SiH ₄	Silane	50.0	.	.	-20 to +40	20 - 95	+/- 1.0	18	25/120	(a)
SO ₂	Sulfur dioxide	10.0	.	.	-20 to +50	15 - 90	+/- 0.7 (range 0-10)	36	15/45	(a)
		30.0	.	.						
		100	.	.						
CH ₃ Cl	Methyl chloride	500	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
CH ₂ Cl ₂	Methylene chloride	500	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R12		1% vol.	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R22		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R123		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
FX56		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R134 a		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R142 b		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R11		1% vol.	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R23		1% vol.	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R141 b		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R143 a		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R404 a		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R507		2000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R410 a		1000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R32		1000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R227		1% vol.	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R407 c		1000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Freon R408 a		1000	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/90	(d)
Ethanol		500	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/60	(d)
Toluene		500	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/60	(d)
Isopropanol		500	.	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/60	(d)
2-butanone (MEK)		500	•	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/60	(d)
Xylene		500	•	.	-20 to +55	20 - 95	+/- 15% (from 20 to 70% FS)	40	25/60	(d)

(a) +4°C to +20°C
20% to 60% HR
1 bar ± 10%
6 month maximum

(b) -25°C to +60°C
20% to 60% HR
1 bar ± 10%
6 month maximum


(c) +4°C to +20°C
20% to 60% HR
1 bar ± 10%
3 month maximum

(d) -20°C to +50°C
20% to 60% HR
1 bar ± 10%
6 month maximum

XP Transmitter with XP sensor	
Sensor:	• Catalytic / Electrochemical / Semi conductor / Infrared
Detected gases:	• Explosive or toxic gases, O ₂ , freons or VOC
Material:	• Epoxy coated aluminium + 316 stainless steel sensor
Pre-calibrated block:	• yes
Power supply:	• 16 to 30 V DC
Average consumption:	• 140 mA (catalytic) • 80 mA (electrochemical) • 155 mA (OLCT 60 / OLCT IR, max. current peak 550 mA) • 120 mA (infrared XP IR)
Output signal:	• 0 - 23 mA (4-20 mA reserved for measurement)
Cable:	• 3 active wires, shielded cable
Max. cable loop resistance / length	• Catalytic: 32 Ω / 1 km at 1.5 mm ² (16 AWG) • Electrochemical and XP IR: 48 Ω / 1.5 km at 1.5 mm ² (16 AWG) with OLDHAM controller: OLCT 60 / OLCT IR: 8 Ω / 200 m at 1.5 mm ² (16 AWG)
Ingress protection:	• IP 66
Approvals:	• ATEX II 2 GD • Ex d IIC T ₄ (OLCT 60) • Ex d IIC T ₄ (OLCT IR) • SIL 2 according to EN 50271 • SIL 2 according to EN 61508 (OLCT IR only) • Electromagnetic compatibility according to EN 50270
Weight:	• 2.1 kg • 4.08 kg for OLCT 60 / OLCT IR
Dimensions:	• 154 x 186 x 121 mm / 6.06 x 7.32 x 4.76 inches • 317.5 x 129.3 x 169 mm / 12.50 x 5.08 x 6.65 inches for OLCT 60 / OLCT IR
Operating temperature:	-25°C to +55°C

XP transmitter with IS sensor	
Sensor:	• Electrochemical
Detected gases:	• Toxic gases or O ₂
Material:	• Epoxy coated aluminium + 316 stainless steel sensor
Pre-calibrated block:	• yes
Power supply:	• 16 to 30 V DC
Average consumption:	• 80 mA
Output signal:	• 0-23 mA (4-20 mA reserved for measurement)
Cable:	• 3 active wires, shielded cable
Max. cable loop resistance / length	with OLDHAM controller: • 48 Ω / 1.5 km at 1.5 mm ² (16 AWG)
Ingress protection:	• IP 66
Approvals:	• ATEX II 2 GD • Ex d IIC T ₄ • SIL 2 according to EN 50271 • Electromagnetic compatibility according to EN 50270
Weight:	• 2.1 kg • 4.08 kg for OLCT 60 / OLCT IR
Dimensions:	• 154 x 186 x 121 mm / 6.06 x 7.32 x 4.76 inches • 317.5 x 129.3 x 169 mm / 12.50 x 5.08 x 6.65 inches for OLCT 60 / OLCT IR
Operating temperature:	-25°C to +55°C

Accessories

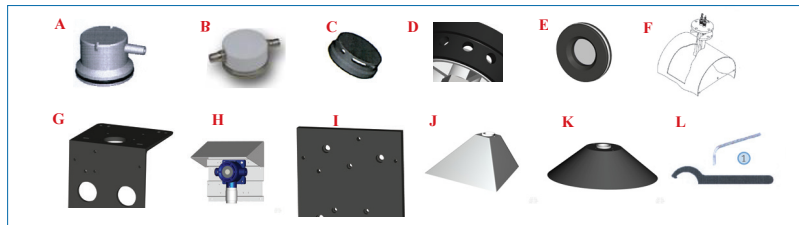

- | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>A Calibration cup (6331141)
allows introduction of calibration gas on the sensor</p> <p>B Bypass adapter (6327910)
allows measurement of samples</p> <p>C Splash guard system (6329004)
protects the detector from liquid projections</p> <p>D Remote gas introduction head (6327911)
allows introduction of gas without opening the detector</p> <p>E Removable protective filter (6335975)
protects the sensor against projections and dust</p> <p>F Duct measurement kit (6793322)
allows gas monitoring in a duct</p> | <p>G Mounting bracket (6322420)
allows the mounting of the detector to the ceiling</p> <p>H Protective cover (6123716)
protects the detector against bad weather conditions or against direct sun radiations</p> <p>I Adapter plate (6793718)
allows the replacement of another OLDHAM detector without re-drilling</p> <p>J Wall mounted collecting cone (6331169)
for use with lighter-than-air gases</p> <p>K Ceiling mount collecting cone (6331168)
for use with lighter-than-air gases</p> <p>L Tool kit (6147877)</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

As an ISO 9001 & ISO 14001 approved company, OLDHAM quality assurance programmes demand the continuous assessment and improvement of all OLDHAM products. Information in this leaflet could thus change without notification and does not constitute a product specification. Please contact OLDHAM or their representative if you require more details.

EMEA
Oldham - France
Tel: +33 (0) 3 21 60 80 80
Fax: +33 (0) 3 21 60 80 00
info@oldhamgas.com

AMERICAS
Sales Office - USA
Tel: +1 713-559-9200
Fax: +1 281-292-2860
sh-sale@tycoint.com

ASIA PACIFIC
Oldham - China
Tel: +86 21 3127 6373
Fax: +86 21 3127 6365
sales@oldhamgas.com



Learn More.
www.TycoGFD.com